

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 December 2003 (18.12.2003)

PCT

(10) International Publication Number
WO 03/103547 A1

(51) International Patent Classification⁷: **A61F 5/01**

(21) International Application Number: **PCT/NL03/00418**

(22) International Filing Date: **5 June 2003 (05.06.2003)**

(25) Filing Language: **Dutch**

(26) Publication Language: **English**

(30) Priority Data:
1020777 6 June 2002 (06.06.2002) NL

(71) Applicant (for all designated States except US): **KVLMT, B. V. [NL/NL]; Palatijn 13, NL-7521 PN Enschede (NL).**

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BESSELINK, Mark, Stefan [NL/NL]; Goudsbloemstraat 44, NL-7531 DE Enschede (NL), VAN LEERDAM, Nicolaas, Gerardus, Adrianus [NL/NL]; Parijsstraat 19, NL-7559 KN**

Hengelo (NL). **VAN DER WOUDE, Jurrie [NL/NL];** Ter Wadding 8, NL-7608 LH Almelo (NL).


(74) Agent: **SCHUMANN, Bernard, Herman, Johan, Ir.;** Schumann Patent Consultancy B.V., Boddenkampstraat 51, NL-7522 BZ Enschede (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: **ORTHESIS WITH MULTIPLE HINGE**

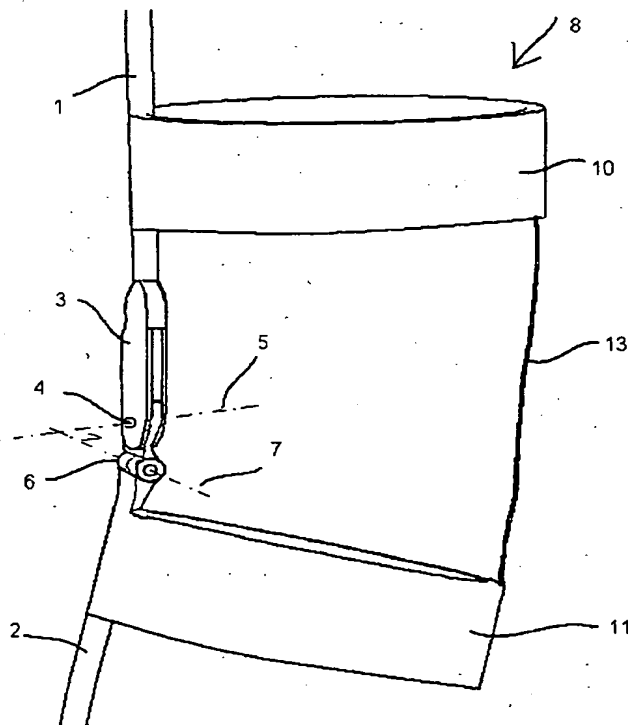

(57) Abstract: An orthopaedic device comprises: a structure comprising two substantially rigid parts, for instance a rod, which parts are coupled to each other by means of hinge means and each comprise fastening means for optional temporary fastening to a limb part, wherein a pivot axis of the hinge means extends at least more or less in the region and in the direction of the pivot axis zone of the relevant joint. The device according to the invention has the feature that the hinge means comprise two hinges, the respective pivot axes of which extend in directions which make an angle with each other of 90 ± 40 , preferably 90 ± 20 .

WO 03/103547 A1